



## LinearPacWS™

### LINEARPACWS™ 1200MM 22/28/34/40W IP65 LED ANTI-CORROSIVE 4000K

- High-efficiency (150lm/W) IP65 corrosion-resistant linear batten with opal diffuser for even and uniform light distribution.
- IP65 rated cable glands on both ends as well as at rear entrance enable quick and simple through-wiring and product installation.
- Quick release hinged gear tray with durable stainless steel anti-tamper clips fitted for faster installation and maintenance. After the base is secured, the diffuser simply clips into place.
- IK08 polycarbonate diffuser and housing vandal-proof. Suitable for ambient temperatures from -20°C to +40°C.
- 4 Wattage Selections available for ultimate flexibility in every application and perfect retrofit solution for single and twin fluorescent fittings.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
<b>AC156930</b>	Non-Dimmable	4000K	22 / 28 / 34 / 40W	3300 - 6000lm	Up to 150lm/W	80



Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## LinearPacWS™

### LINEARPACWS™ 1200MM 22/28/34/40W IP65 LED ANTI-CORROSIVE 4000K

#### Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK08
Operating Temperature Range	-20°C / +40°C
Mounting Type	Surface mounted / Suspended
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Plastic
Cover Material	PC
Finishing	Grey
Available accessories	N/A

#### Technical Specifications



Wattage	22 / 28 / 34 / 40W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>25,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 50,000hrs
Energy Rating	C
Insulation Coverable	N/A
Inrush Current	20A/269µs

#### Photometric Specifications

Lumens	22W 3300lm 28W 4200lm 34W 5100lm 40W 6000lm
Efficiency	Up to 150lm/W
Colour Temperature	4000K
Light Colour Definition	Neutral White
SDCM	<4
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

#### Logistic Details

EAN / Barcode	3609640156930
Product Weight	1330g
Product Dimensions (ODxH / LxWxH)	1270 x 85 x 70mm
Boxed Product Weight	1700g
Boxed Product Dimensions (LxWxH)	1280 x 90 x 74mm
Outer Carton Boxed Product Quantity	8 pcs
Outer Carton Dimensions (LxWxH)	1295 x 385 x 170mm

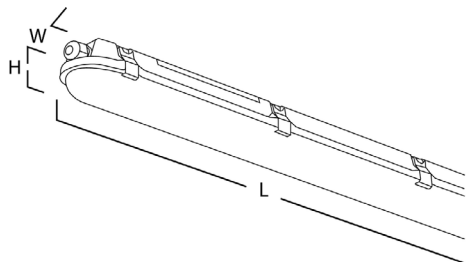

10/30/2024