

## InterLEDCS™

### INTERLEDCS™ 30W LED 1200MM LINEAR LIGHT WHITE COLOUR SWITCHABLE 3CCT 3000/4000/6500K

- Colour Switchable Connectable LED Linear with high quality extruded aluminium body. Supplied with 1500mm suspension cable and surface mount brackets as well as interconnection connector.
- Opal polycarbonate diffuser ensures even and uniform light distribution.
- Colour switchable between 3000K, 4000K & 6500K.
- Available in black and white finish and in 1200 & 1500mm length.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
<b>CL149864</b>	Non-Dimmable	3000 / 4000 / 6500K	30W	3260-3410lm	Up to 111lm/W	80



Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## InterLEDCS™

### INTERLEDCS™ 30W LED 1200MM LINEAR LIGHT WHITE COLOUR SWITCHABLE 3CCT 3000/4000/6500K

#### Specifications and Benefits

Ingress Protection Rating	IP20
Operating Temperature Range	-20°C / +45°C
Mounting Type	Surface mounted / Suspended
Certification	CE
Protection Class	Class I
Installation Location	Indoor
Body Material	Aluminium
Cover Material	PC
Finishing	White
Available accessories	N/A

#### Technical Specifications



Wattage	30W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>10,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 50,000hrs
Energy Rating	G
Insulation Coverable	N/A
Inrush Current	4A

#### Photometric Specifications

Lumens	3260 / 3410 / 2950lm
Efficiency	Up to 111lm/W
Colour Temperature	3000 / 4000 / 6500K
Light Colour Definition	Switchable White
SDCM	<6
Beam Angle	110°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

#### Logistic Details

EAN / Barcode	3609640149864
Product Weight	1720g
Product Dimensions (ODxH / LxWxH)	1200 x 59 x 70mm
Boxed Product Weight	1900g
Boxed Product Dimensions (LxWxH)	1335 x 75 x 65mm
Outer Carton Boxed Product Quantity	6 pcs
Outer Carton Dimensions (LxWxH)	1350 x 175 x 215mm

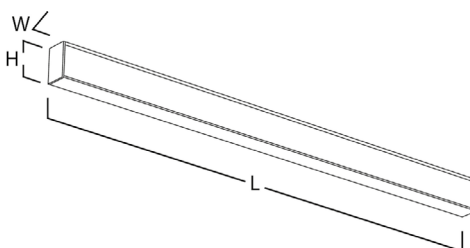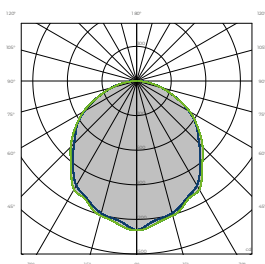

10/30/2024