

## BackLite CWS™

### BACKLITEPROCWS™ IP54 CWS LED PANEL UGR19 1200X600MM 2CCT 3000/4000K

- Colour & Wattage Switchable IP54 high-efficiency LED Backlit Panel with optical pattern PMMA lenses engineered for even and uniform light distribution.
- Microprismatic diffuser provides excellent glare control with UGR <19.
- Suitable for installations in 15 and 24mm t-bar ceilings as well as ceiling suspension, surface mount or recess mount in plasterboard.
- Flicker-free non-dimmable LED driver pre-wired for simplified and fast installation.
- 4 Wattage and 3 Colour Selections available for ultimate flexibility in every application.

Code	Version	Colour	Watts	Lumens	lm/W	UGR	CRI
LP157883	Non-Dimmable	3000 / 4000 /K	28 / 32 / 30 /34W	3528-5600lm	Up to 140lm/W	19	80



Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## BackLite CWS™

### BACKLITEPROCWS™ IP54 CWS LED PANEL UGR19 1200X600MM 2CCT 3000/4000K

#### Specifications and Benefits

Ingress Protection Rating	IP54
IK Rating	IK07
Operating Temperature Range	-10°C / +40°C
Mounting Type	Recessed
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium
Cover Material	PMMA
Available accessories	N/A

#### Photometric Specifications



Lumens	28W - 3528 / / 3920lm
	32W - 4032 / / 4480lm
	30W - 4536 / / 5040lm
	34W - 50405600lm
Efficiency	Up to 140lm/W
Colour Temperature	3000 / 4000 /K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	90°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

#### Technical Specifications

Wattage	28 / 32 / 30 /34W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>10,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 50,000hrs
Insulation Coverable	NO
Inrush Current	25A

#### Logistic Details

EAN / Barcode	3609640157883
Product Weight	2700g
Product Dimensions (ODxH / LxWxH)	1195 x 595 x 32mm
Recess Depth	32mm
Boxed Product Weight	3650g
Boxed Product Dimensions (LxWxH)	45 x 310 x 1230mm
Outer Carton Boxed Product Quantity	5 pcs
Outer Carton Dimensions (LxWxH)	250 x 625 x 1245mm

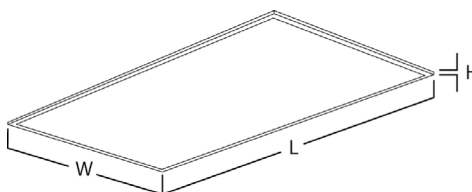

10/30/2024