


LouvreCWS™

LOUVRE CWS™ REFLECTOR MODULE 15W 3CCT 3000K/3500/4000K WHITE

- Colour Switchable high-efficiency (up to 140lm/W) Modular LED Reflector Panel uses low glare effector technology to replicate the appearance of traditional direct/indirect luminaires.
- Full product modularity for maximum flexibility and product maintainance. Select individual components to customize your product according to your project requirements.
- High efficiency light modules, available in white, black and silver, with low glare reflector module significantly reduce glare and enhance visual comfort.
- Different Colour Finishes of Backplate and reflector module available for maximum flexibility in every application.

| Code | Version | Colour | lm/W | UGR | CRI |
|----------|--------------|-------------------|---------|-----|-----|
| LP158590 | Non-Dimmable | 300 / 3500 / 400K | 130lm/W | 19 | 80 |

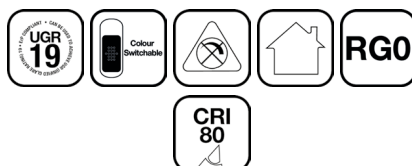

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

LouvreCWS™

LOUVRE CWS™ REFLECTOR MODULE 15W 3CCT 3000K/3500/4000K WHITE

Specifications and Benefits

| | |
|-----------------------------|---------------------------------|
| Ingress Protection Rating | IP20 |
| Operating Temperature Range | -10°C / +45°C |
| Positional Adjustment | |
| Certification | CE |
| Protection Class | Class II |
| Installation Location | Indoor |
| Body Material | Plastic |
| Cover Material | PET |
| Available accessories | • 0-10V Driver • Dali Driver |

Technical Specifications

| | |
|----------------------|-------------|
| Nominal Voltage | 220-Vac |
| Lifetime Hours | L70 B50 hrs |
| Insulation Coverable | NO |

Photometric Specifications

| | |
|-------------------------|-------------------|
| Efficiency | Up to 130lm/W |
| Colour Temperature | 300 / 3500 / 400K |
| Light Colour Definition | Switchable White |
| SDCM | <4 |
| Beam Angle | 80° |
| CRI | >80 |
| Dimming Type | Non-Dimmable |
| Distribution | Direct / Indirect |

Logistic Details

| | |
|-------------------------------------|---------------|
| EAN / Barcode | 3609640158590 |
| Product Weight | 0g |
| Boxed Product Weight | 0g |
| Boxed Product Dimensions (LxWxH) | 0 x 0 x 0mm |
| Outer Carton Boxed Product Quantity | 0 pcs |
| Outer Carton Dimensions (LxWxH) | 0 x 0 x 0mm |