


## LouvreCWS™

### LOUVRE CWS™ REFLECTOR MODULE 15W 3CCT 3000K/3500/4000K BLACK

- Colour Switchable high-efficiency (up to 140lm/W) Modular LED Reflector Panel uses low glare effector technology to replicate the appearance of traditional direct/indirect luminaires.
- Full product modularity for maximum flexibility and product maintainance. Select individual components to customize your product according to your project requirements.
- High efficiency light modules, available in white, black and silver, with low glare reflector module significantly reduce glare and enhance visual comfort.
- Different Colour Finishes of Backplate and reflector module available for maximum flexibility in every application.

Code	Version	Colour	lm/W	UGR	CRI
LP158613	Non-Dimmable	300 / 3500 / 400K	130lm/W	19	80

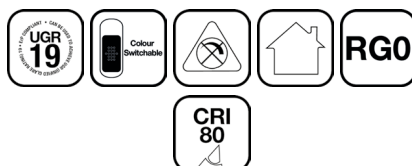

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## LouvreCWS™

### LOUVRE CWS™ REFLECTOR MODULE 15W 3CCT 3000K/3500/4000K BLACK

#### Specifications and Benefits

Ingress Protection Rating	IP20
Operating Temperature Range	-10°C / +45°C
Positional Adjustment	
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Plastic
Cover Material	PET
Available accessories	• 0-10V Driver • Dali Driver

#### Technical Specifications

Nominal Voltage	220-Vac
Lifetime Hours	L70 B50 hrs
Insulation Coverable	NO

#### Photometric Specifications

Efficiency	Up to 130lm/W
Colour Temperature	300 / 3500 / 400K
Light Colour Definition	Switchable White
SDCM	<4
Beam Angle	80°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct / Indirect

#### Logistic Details

EAN / Barcode	3609640158613
Product Weight	0g
Boxed Product Weight	0g
Boxed Product Dimensions (LxWxH)	0 x 0 x 0mm
Outer Carton Boxed Product Quantity	0 pcs
Outer Carton Dimensions (LxWxH)	0 x 0 x 0mm